



INDICATIVE PHOTO

General features : RS4380B

RS range unit coolers have been designed to be installed inside cold rooms suited for fresh and frozen goods storage.

Their shape, being extremely compact, make their installation possible also in cold rooms having very small dimensions

RS range unit coolers are available in two main versions: the one suited for high temperature (differentiated fin spacing 3,5/7mm); the other version suited for medium and low temperature application (differentiated fin spacing 4,5/9mm).

In models for high temperature the version with the fitted defrosting heater is not available; for these models the heaters are optional items and they will be supplied not mounted.

The models for medium and low temperature application are available in the version supplied without defrosting heater (mod. RS...B) and with defrosting heater mounted and wired on the unit cooler's terminal box as well (mod. RS...BED).

The coil is made of aluminium fins and 3/8" copper tube with geometry 25x22

It is tested with nitrogen at a pressure of 25 bar

The fan motor models in use have the following features:

Manufactured following EN 60335-1 laws, with internal thermal protection

Draw through air flow

Fan guard made of plastic and brackets made of steel

Fan diameter 200mm, 34° inclination

Power supply 220-240V/1/50-60Hz

IP42 protection rate

Operating temperature from -40°C to +40°C

B insulation class

It is tested with nitrogen at a pressure of 25 bar

The housing is made of aluminium

The manufacturing solutions used give the housing strength and guarantee the absence of vibrations during the functioning.

Screws, washers and nuts are made of stainless steel

The B and BED models are supplied with fitted drip tray



INDICATIVE PHOTO


Product file : Unit coolers

Code	RS4380BED
Model	Ceiling
Range	RS
Application	LBP
Net weight	17,1 kg
Inlet connection	12 mm-1/2" SAE
Outlet connection	16 mm
Drain connection	1/2" Gas (20mm)
Ped	0
Rows	4
Fin spacing	4,5/9
Circuit volume	2,19 dm ³
Total surface	7,28 m ²

Fan motor

Type	AC
Fans no.	4
Diameter	200 mm
Power supply	220-240/1/50-60
Defrost	1300 W
Speed	1300 rpm
Power consumption	172 W
Current consumption	1 A
Air flow	866 m ³ /h
Air throw	2.5 m

Technical drawing - RS4380B

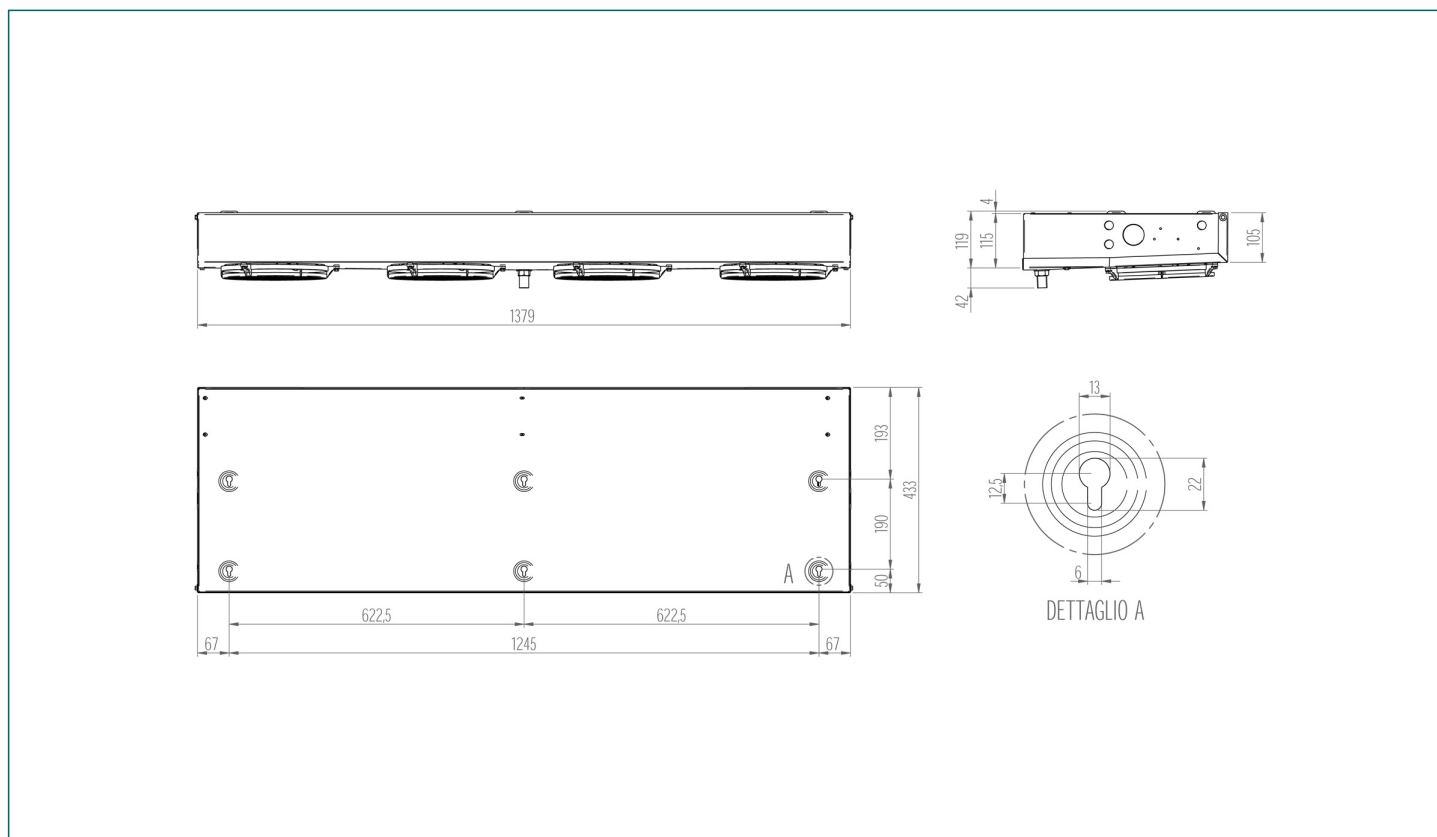

Refrigerating capacity table (watt) - Gas : R404A

dT \ Tc	-40°C	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C
10	859	1000	1200	1390	1570	1740	1890	2050	2240
9	799	955	1130	1290	1450	1600	1720	1870	2030
8	744	892	1040	1190	1320	1430	1540	1670	1810
7	693	820	947	1060	1170	1250	1350	1460	1580
6	631	731	831	921	993	1070	1150	1240	1350
5	549	621	693	759	808	853	915	996	1090